

- Machine frame made of high-quality fine-grain cast-iron with heavy ribbing to ensure maximum reduction of vibrations
- Precision-ground gears for quiet operation
- Practical layout of electrical and mechanical controls at the headstock for easy operation
- Motorized arm height adjustment



Rigid column base with central main switch



Swiveling boom for large throat widths



See this machine
in action on
YouTube



Options

Part No.

• Universal Facing / Lathe Bore Head ADA / MT 4	103402
• Reduction Sleeve MT 4/1	103820
• Accessory-Set MT 4 8-pc.	104594

For additional options for this machine, visit our website and search for R 32 (Product Search)

Specifications

R 32 Basic

Drilling capacity	in	1.26
Spindle nose-to-table surface distance	in	13 - 34
Machine table dimensions	in	54x28x6
Quill stroke	in	9
Spindle mount		MT 4
Speed range	rpm	(6) 75 - 1,220
Motor rating main drive	Hp	2
Overall dimensions (length x width x height)	in	56x29x75
Weight	lbs	2,601
Part No.		101522

Standard Equipment

coolant system, cube table, halogen lights


KSR 40 Advance

Linear guides for easy handling and stability

- Powerful machine for drilling, tapping, countersinking and boring
- Large travel ranges and many different machining stations provide maximum setup and machining possibilities
- Extremely sturdy construction ensures high accuracy and reliability
- Quick and precise tool positioning: hydraulic clamping is released by the push of a button, head easily swivels forward, backward and horizontally



- **Infinitely variable spindle speed**
- **Digital drilling depth indicator**

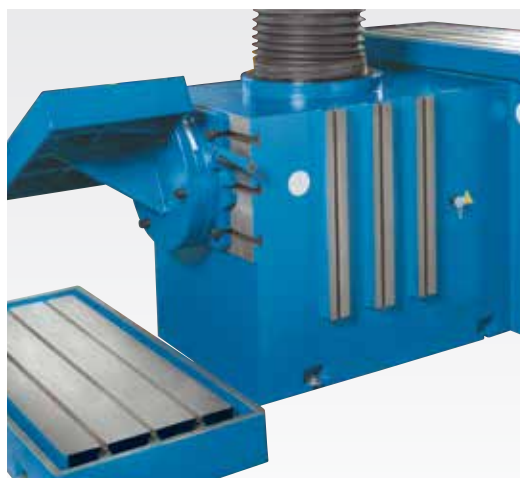

Additional setup areas meets all your requirements

Options	Part No.
• Coolant Concentrate 5 Ltr.	103184
• Universal Facing / Lathe Bore Head ADA / MT 4	103402
• De Luxe Clamping Tool Set 18/M16	105305

For additional options for this machine, visit our website and search for KSR 40 (Product Search)

Specifications

	KSR 40 Advance	
Drilling capacity	in	1.57
Spindle nose-to-table surface distance	in	31
Quill stroke	in	8
Table set up area	in	47x20
Spindle mount	MT	4
Spindle speed (infinitely variable)	rpm	50 - 2,000
Motor rating main drive	Hp	3
Overall dimensions (length x width x height)	in	68x48x89
Weight	lbs	6,028
Part No.		162363

Standard Equipment

digital speed indicator, additional setup areas at the side and rear, cube table, swiveling horizontal table, digital boring depth indicator, work lamp, coolant system, tapping unit, drill chuck with tool-holder bits, reducing sleeves, operating tools, operator manual