



QAN 260M, QAN 260MH

Mode of operation	Speed n	Power P	Torque M	Current I
S1	1 500 rpm	15.0 kW	95.5 Nm	35.0 A
	6 500 rpm	15.0 kW	22.0 Nm	–
	10 000 rpm	10.0 kW	9.5 Nm	–
	12 000 rpm	4.0 kW	3.2 Nm	–
S6-60%	1 500 rpm	20.0 kW	127.3 Nm	43.3 A
	5 000 rpm	20.0 kW	38.2 Nm	–
	9 000 rpm	13.5 kW	14.3 Nm	–
S6-40%	1 500 rpm	25.0 kW	159.2 Nm	52.3 A
	4 500 rpm	25.0 kW	53.1 Nm	–
	8 000 rpm	16.8 kW	20.1 Nm	–
S6-25%	1 500 rpm	32.0 kW	203.7 Nm	65.0 A
	4 000 rpm	32.0 kW	76.4 Nm	–
	6 000 rpm	23.7 kW	37.7 Nm	–

Power characteristic curve

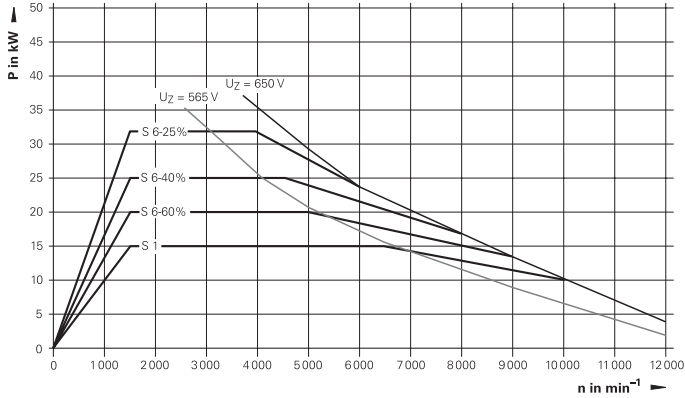


Torque characteristic curve

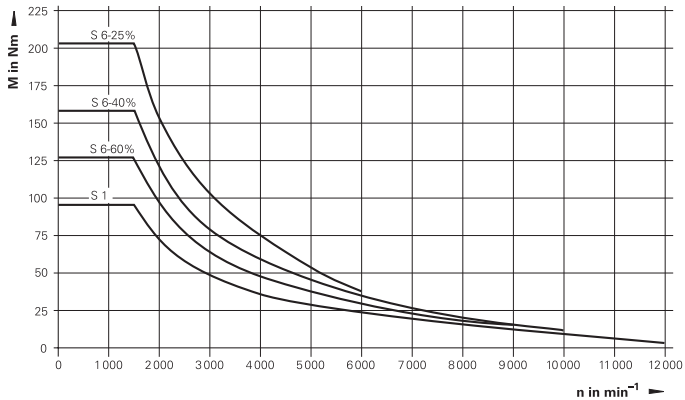

QAN 260L, QAN 260LH

Mode of operation	Speed n	Power P	Torque M	Current I
S1	1 500 rpm	20.0 kW	127.3 Nm	46.0 A
	6 500 rpm	20.0 kW	29.4 Nm	–
	10 000 rpm	13.0 kW	12.4 Nm	–
	12 000 rpm	8.0 kW	6.4 Nm	–
S6-60%	1 500 rpm	25.0 kW	159.2 Nm	56.0 A
	6 000 rpm	25.0 kW	39.4 Nm	–
	10 000 rpm	16.0 kW	15.3 Nm	–
	12 000 rpm	8.0 kW	6.4 Nm	–
S6-40%	1 500 rpm	30.0 kW	191.0 Nm	65.0 A
	5 500 rpm	30.0 kW	52.1 Nm	–
	10 000 rpm	17.5 kW	16.7 Nm	–
S6-25%	1 500 rpm	37.0 kW	235.5 Nm	79.0 A
	5 000 rpm	37.0 kW	70.7 Nm	–
	8 000 rpm	24.0 kW	28.6 Nm	–

Power characteristic curve

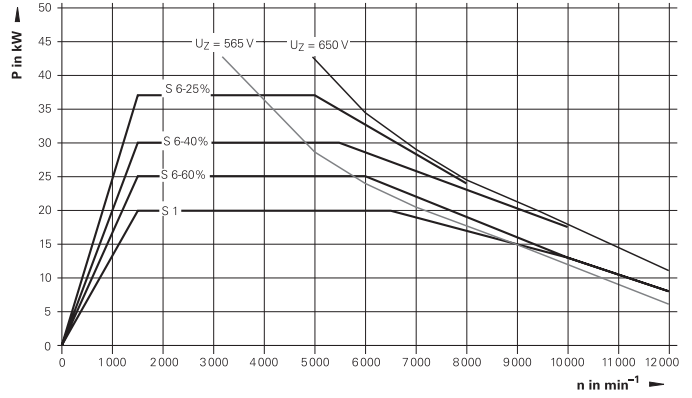

Torque characteristic curve

